



Computing Jet Screech—A Complex Aeroacoustic Feedback System

Ching Y. Loh
Taitech, Inc., Brook Park, Ohio

Lennart S. Hultgren
Glenn Research Center, Cleveland, Ohio

The NASA STI Program Office . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the Lead Center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized data bases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA Access Help Desk at 301-621-0134
- Telephone the NASA Access Help Desk at 301-621-0390
- Write to:
NASA Access Help Desk
NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076



Computing Jet Screech—A Complex Aeroacoustic Feedback System

Ching Y. Loh
Taitech, Inc., Brook Park, Ohio

Lennart S. Hultgren
Glenn Research Center, Cleveland, Ohio

Prepared for the
Second International Conference on Computational Fluid Dynamics
cosponsored by NASA, Dassault Aviation, DSTO, the School of Aerospace,
Mechanical, and Mechatronic Engineering, University of Sydney, and
the Institution of Engineers, Sydney, Australia, July 15–19, 2002

National Aeronautics and
Space Administration

Glenn Research Center

Acknowledgments

The authors wish to thank Dr. J. Panda for fruitful discussions. The Supersonic Propulsion Technology Project Office at NASA Glenn Research Center supported this work.

This report is a formal draft or working paper, intended to solicit comments and ideas from a technical peer group.

The Aerospace Propulsion and Power Program at NASA Glenn Research Center sponsored this work.

Available from

NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22100

Available electronically at <http://gltrs.grc.nasa.gov>

Computing Jet Screech—A Complex Aeroacoustic Feedback System

Ching Y. Loh
Taitech, Inc.
Brook Park, Ohio 44142

Lennart S. Hultgren
National Aeronautics and Space Administration
Glenn Research Center
Cleveland, Ohio 44135

Abstract. The space-time conservation-element and solution-element method is employed to numerically study the near-field axisymmetric screech-tone noise of a typical underexpanded circular jet issuing from a sonic nozzle. For the computed case, corresponding to a fully expanded Mach number of 1.19, the self-sustained feedback loop is established without artificial means. The computed shock-cell structure, acoustic wave length, screech tone frequency, and sound pressure levels are in good agreement with existing experimental results.

1 Introduction

Underexpanded supersonic jets radiate mixing noise, broadband shock-associated noise, as well as very loud discrete screech tones under certain conditions. Screech is of particular interest not only because of general noise-reduction concerns, but also because of potentially destructive structural interaction leading to sonic fatigue. Many experimental and theoretical investigations of jet noise have been carried out, see the review papers [1,2] for a comprehensive discussion. Mixing noise is directly associated with large-scale structures, or instability waves, in the jet shear layer; whereas, broadband shock-associated noise and screech tones are associated with the interaction of these waves with the shock-cell structure in the jet core. The screech tones arise because part of the acoustic waves generated by the wave/shock-cell interaction propagate upstream and re-generate the instability waves at, or in the vicinity of, the nozzle lip. This feedback loop leading to distinct screech tones is sensitive to small changes in the system conditions, and its explanation is to date mostly based on experimental observations, see [1,2].

Jet noise is a challenging topic in computational aeroacoustics – in particular, near-field noise computation in the presence of shock cells in the jet core – and reliable direct numerical simulation of jet screech noise has up to quite recently not been feasible. It imposes stringent requirements that the scheme must be able to: (i) handle shock waves, (ii) resolve acoustic waves with low dispersion and dissipation errors, (iii) resolve the instability waves in the jet shear layers and their interaction with the core shock-cell structure and (iv) have an effective non-reflecting boundary condition. Successful direct computation of screech for circular jets have been carried out by Shen and Tam [3,4] using the well-known DRP scheme and by the present authors [5] using the recent space time conservation element and solution element method, CE/SE, [6,7]. Further

direct simulation of screech is presented below using the axisymmetric CE/SE Navier-Stokes scheme. The method is described in detail in [5,6].

2 Numerical Method

In general, the CE/SE method systematically solves a set of discretized (second-order accurate in both space and time) *integral* equations derived directly from the physical conservation laws and naturally captures shocks and other discontinuities in the flow. Both dependent variables and their derivatives are computed simultaneously. As a consequence, the flow vorticity can be obtained without reduction in accuracy. Non-reflecting boundary conditions (NRBCs) are also easily implemented because of the flux-conservation formulation.

With an unstructured grid, the CE/SE procedure is easily adapted to complicated geometries. Here, an unstructured triangle grid is used. Figure 1 shows a typical triangle cell, $\triangle ABC$, with O being its center and D , E , F being the centers of its three neighboring cells. The flow variables at the current time level


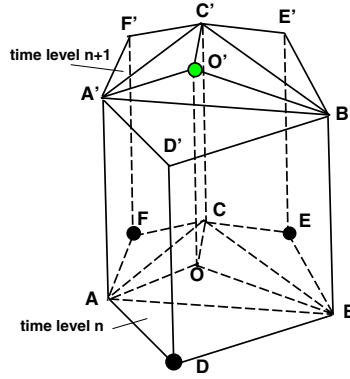


Fig. 1. CE/SE unstructured grid: hexagon cylinder $ADBECFA-A'D'B'E'C'F'A'$ containing three CEs $OADBO-O'A'D'B'O'$, $OBECO-O'B'E'C'O'$, $OCFAO-O'C'F'A'O'$

n are stored at the center of each triangle cell. Three quadrilateral cylinders (conservation elements, CEs) are formed by the edges that connect the vertices and the center of the triangle and its three neighbors. The solution elements, SEs, are the interfaces between the CEs. An integral form of the conservation laws is applied to the hexagon cylinder that consists of these three quadrilateral cylinder conservation elements and explicitly determines the full solution at O' at the new time level $n + 1$ using only information stored at D , E , and F (no extrapolations/interpolations across a stencil of cells are needed). Discontinuities are allowed to occur in a conservation element. Details about the unstructured CE/SE method can be found in [8]. The weighted α - ϵ CE/SE scheme is used with the weighting parameter $\alpha = 1$ and $\epsilon = 0.5$ in the present computations.

Figure 2(a) shows the geometry of the convergent nozzle in Panda’s experiment [9]. The flow is choked (i.e. Mach number $M = 1$) at the nozzle exit. The jet Mach number which represents the plenum/ambient pressure ratio for the simulation is $M_j = 1.19$ [9]. The computational domain, see Fig. 2(b), spans between



NASA/TM—2002-211807

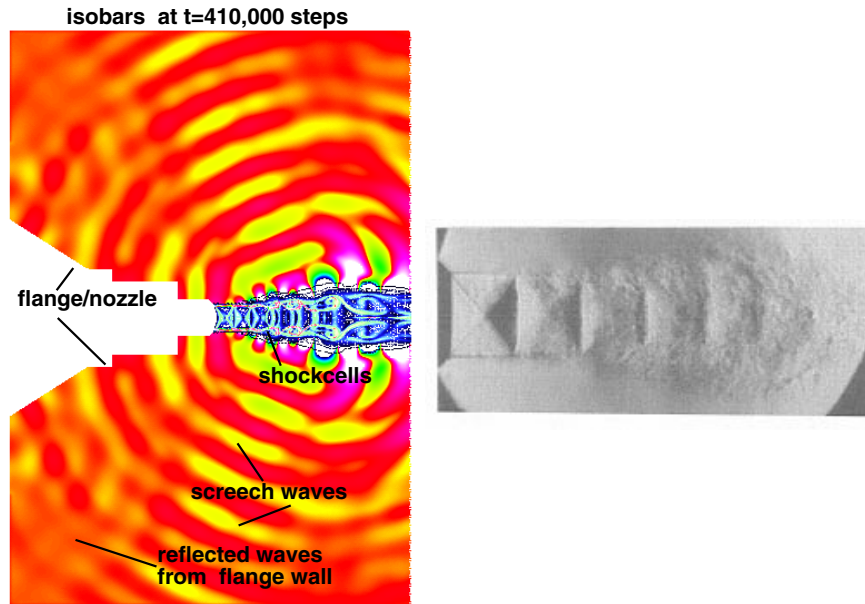


Fig. 3. (a) Isobars at $t=410,000$ steps, showing screech waves and shock cell structures. (b) Experimental Schlieren picture showing the shock-cell structure [9]

shows Panda's [9] data for the A_2 axisymmetric screech mode, the corresponding result from the simulation as well as the computed total SPL and subharmonic of the A_2 mode. Even though the A_2 SPL level in the vicinity of the nozzle lip is

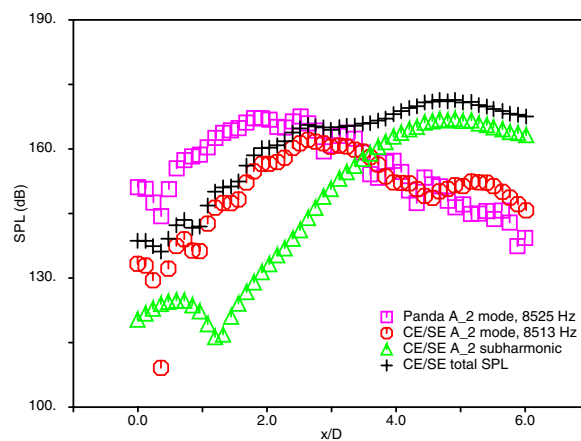


Fig. 4. Comparison of computed and experimental SPL along the shear layer edge

too low, its early streamwise growth rate is, however, well predicted indicating that the jet shear layer is in general well resolved. Nonlinearity in the shear layer limits the amplitude that can be obtained and once the SPL level ‘catches up’ the agreement is very good, in particular the SPL level in the streamwise region where the backward radiating acoustic waves are generated is well predicted. The strong subharmonic that appears further downstream is due to (axisymmetric) vortex pairing in the shear layer and as a consequence a second streamwise peak at the A_2 frequency occurs due to nonlinear effects. However, 3-D effects are most likely to have come into play in the experiment at these streamwise locations leading to suppression of the subharmonic. The reason for the low initial SPL values in the simulation is currently being pursued.

Figure 5 shows computed SPL contours for the A_2 mode. As in the experiment [9], a standing wave structure can be observed along the edge of the jet shear layer. The results are in general agreement with the experimental ones except, as pointed out earlier, that the computed SPL levels are too low in the vicinity of the nozzle lip and the existence of a second, or extended, region of elevated values further downstream ($x/D > 4$).

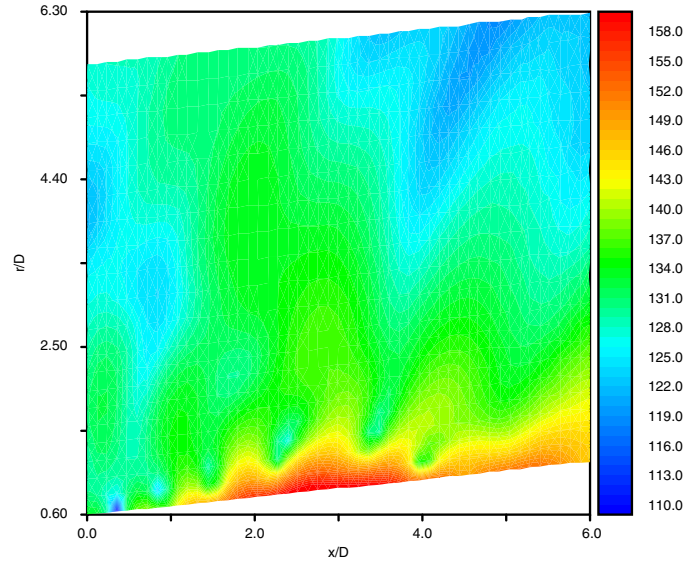


Fig. 5. Computed A_2 -mode SPL levels for Panda's experiment

Figure 6 displays the computed SPL at the nozzle exit lip wall, $x/D = 0$, $r/D = 0.6$. The SPL shows a distinct spike corresponding to the A_2 -mode screech tone observed in Panda's [9] experiment. Note that in our previous work [5], which had a much simplified description of the nozzle external geometry, the A_1 -mode screech tone (not observed in [9]) was also obtained at this condition. This illustrates the sensitivity of the screech phenomenon to geometry changes.

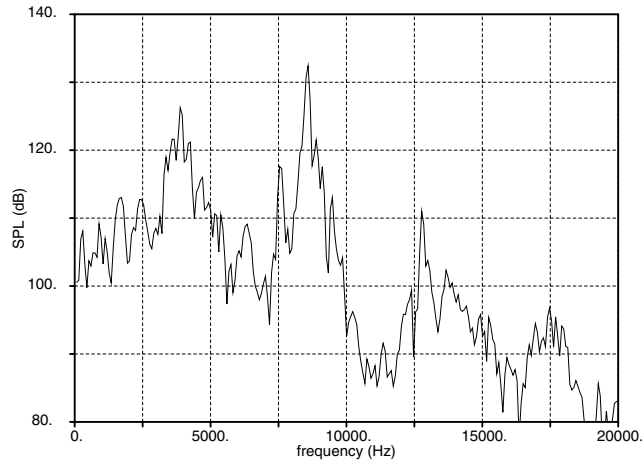


Fig. 6. SPL at nozzle exit ($x/D = 0$, $r/D = 0.6$), 75 Hz digital binwidth

4 Summary

It is concluded that the simulation shows a reasonably good agreement with experimental data in the streamwise region where the flow is expected to be predominantly axisymmetric and, hence, that jet screech is successfully simulated using the CE/SE scheme.

References

1. C.K.W. Tam: *Ann. Rev. Fluid Mech.* **27**, 17-43 (1995)
2. G. Raman: *Prog. Aerospace Sci.* **34**, 45-106 (1998)
3. H. Shen, C.K.W. Tam: *AIAA Paper* 98-0283 (1998)
4. H. Shen, C.K.W. Tam: *AIAA Paper* 2001-0820 (2001)
5. C.Y. Loh, L.S. Hultgren, P.C.E. Jorgenson: *AIAA Paper* 2001-2252 (2001).
6. S.-C. Chang, X.-Y. Wang, Chow, C.-Y. Chow: *J. Comp. Phys.* **156**, 89-136 (1999)
7. C.Y. Loh, L.S. Hultgren, S.-C. Chang: *AIAA J.*, **39**, 794-801 (2001)
8. X.-Y. Wang, S.-C. Chang: *C.F.D. J.* **8**, 309-325 (1999)
9. J. Panda: *J. Fluid Mech.* **378**, 71-96 (1999)

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE August 2002		3. REPORT TYPE AND DATES COVERED Technical Memorandum
4. TITLE AND SUBTITLE Computing Jet Screech—A Complex Aeroacoustic Feedback System			5. FUNDING NUMBERS WU-708-90-43-00	
6. AUTHOR(S) Ching Y. Loh and Lennart S. Hultgren				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration John H. Glenn Research Center at Lewis Field Cleveland, Ohio 44135-3191			8. PERFORMING ORGANIZATION REPORT NUMBER E-13502	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001			10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA TM-2002-211807	
11. SUPPLEMENTARY NOTES Prepared for the Second International Conference on Computational Fluid Dynamics cosponsored by NASA, Dassault Aviation, DSTO, the School of Aerospace, Mechanical, and Mechatronic Engineering, University of Sydney, and the Institution of Engineers, Sydney, Australia, July 15-19, 2002. Ching Y. Loh, Taitech, Inc., Brook Park, Ohio 44142, and Lennart S. Hultgren, NASA Glenn Research Center. Responsible person, Ching Y. Loh, organization code 5800, 216-433-3981.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Categories: 01 and 64 Available electronically at http://gltrs.grc.nasa.gov This publication is available from the NASA Center for AeroSpace Information, 301-621-0390.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) The space-time conservation-element and solution-element method is employed to numerically study the near-field axisymmetric screech-tone noise of a typical underexpanded circular jet issuing from a sonic nozzle. For the computed case, corresponding to a fully expanded Mach number of 1.19, the self-sustained feedback loop is established without artificial means. The computed shock-cell structure, acoustic wave length, screech tone frequency, and sound pressure levels are in good agreement with existing experimental results				
14. SUBJECT TERMS Jet screech noise; Aeroacoustic feedback loop; CE/SE method			15. NUMBER OF PAGES 12	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	